

www.bdnngroup.com.tw

**Taiwanese Fastener
Manufacturer**





**We are a Taiwanese
Manufacturer.**



Scan the QR code
for more information



Broaden Company – Leading Taiwanese manufacturer of high-performance fasteners.

Quality control starts from the very beginning.

Broaden fastener production is 100% powered by wire sourced from CSC Taiwan—ensuring consistent quality from the very start.

At the heart of our manufacturing process are the three most critical pre-production stages: Heading, Pinch Pointing, and Threading—all performed in-house for maximum precision and control.

To guarantee the highest performance and finish, we partner with top-tier local experts for specialized post-processes such as Heat Treatment, Plating, and Surface Treatment. This hybrid approach combines in-house excellence with specialized craftsmanship—delivering fasteners you can trust.

Our current annual production capacity is approx. 800 tons per month, which translates to 480 containers per year, or 40 containers per month.

To ensure fast delivery and competitive pricing, all our products—from fasteners to collated screws—are packaged in-house and undergo a final round of quality inspection before leaving our facility.

At Broaden, innovation is at the core of everything we do. We're continually exploring new materials and advanced manufacturing techniques to enhance product performance and durability. By collaborating closely with our customers and partners, we stay ahead of industry trends and deliver solutions that lead the market.





BROADEN
WORLDWIDE CO., LTD

QUALITY CONTROL PROCESS

1

PRE-PRODUCTION INSPECTION

Drawing Check
Specific Conditions Check

2

HEADING / THREADING / PINCH POINTING

Machinery Condition Check
Molds and Dies Inspection and Setup

3

HEAT TREATMENT

Strictly controlled process
Fully equipped with well maintained case depth and hardness testers

4

SURFACE TREATMENT

Well equipped with salt-spray and corrosion test machinery

5

PRE-SHIPMENT INSPECTION

Manual Sorting and Rearrangement
Optical Sorting (Optional)

6

FINAL INSPECTION

Dimensions, Functionality, Aesthetics

7

PRE-SHIPMENT SAMPLES SENT UPON REQUEST

Pre-shipment samples along with our in-house Certificate of Inspection Reports are provided to customers upon request.

CONTENT

Thread Types & Screw Diameter	01
Fastener Length	03
/ Self-Drilling Screw	
Specialty Series	04
Roofing Screw	05
DIN7504K - Hex Washer Head	06
SAE J78 - Hex Washer Head	07
AS3566 - Hex Flange Head	08
Heavy Duty Series	09
Pan Head	10
Button Head	10
Wafer Head	10
Countersunk Head	11
Countersunk Wings	11
/ Type 17 Wood Screws	12
/ Polycarbonate Roof Fasteners	13
/ Collated Screw	14
Drywall Screw	14

Primary Materials: C1022 / 10B21 Steel from CSC Taiwan.


Sizes: M3.5~M6.3

Length: 400mm max.

Thread & Screw Diameter


Self-Drilling Screws - Thread for Fixing to Steel

ASD THREADS

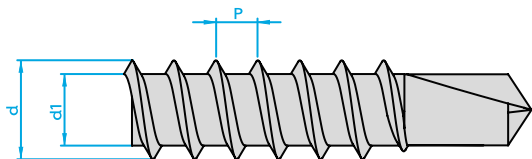


Size	Pitch (nom.) (P)	Major Diameter (d)		Minor Diameter (d1)	
		Min.	Max.	Min.	Max.
M5.5 (No.12)	2.31	5.46	5.79	3.94	4.19
M6.3 (No.14)	2.54	6.30	6.45	4.52	4.70

BSD THREADS

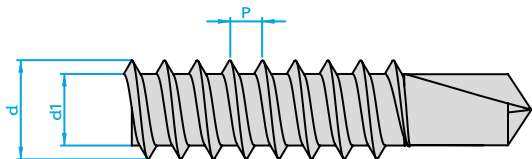

Size	Pitch (nom.) (P)	Major Diameter (d)		Minor Diameter (d1)	
		Min.	Max.	Min.	Max.
M3.5 (No.6)	1.27	3.43	3.53	2.51	2.64
M4.2 (No.8)	1.41	4.09	4.22	2.95	3.10
M4.8 (No.10)	1.59	4.65	4.80	3.43	3.58
M5.5 (No.12)	1.80	5.31	5.46	3.99	4.17
M6.3 (No.14)	1.80	6.10	6.25	4.70	4.88

CSD THREADS

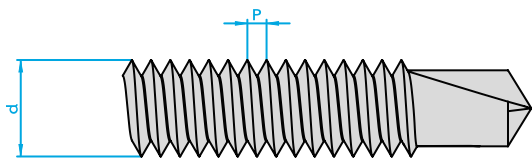


Size	Pitch (nom.) (P)	Major Diameter (d)	
		Min.	Max.
M3.5 (No.6)	0.79	3.37	3.51
M4.2 (No.8)	0.79	4.03	4.17
M4.8 (No.10)	1.06	4.66	4.83
M5.5 (No.12)	1.06	5.32	5.49
M6.3 (No.14)	1.27	6.17	6.35

Thread & Screw Diameter

Type 17 Screws - Thread for Fixing to Timber


TYPE 17 THREADS

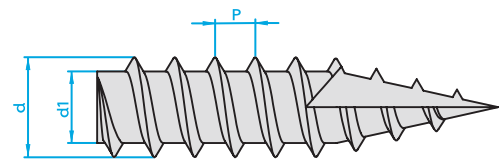

Size	Pitch (nom.) (P)	Major Diameter (d)		Minor Diameter (d1)	
		Min.	Max.	Min.	Max.
M3.5 (No.6)	1.41	3.45	3.58	2.44	2.59
M4.2 (No.8)	1.69	4.11	4.27	2.95	3.12
M4.8 (No.10)	2.12	4.78	4.93	3.20	3.38
M5.5 (No.12)	2.31	5.46	5.74	3.94	4.19
M6.3 (No.14)	2.54	6.30	6.45	4.52	4.70

Drywall Screws - Thread for Fixing Plasterboard to Steel

DRYWALL THREADS

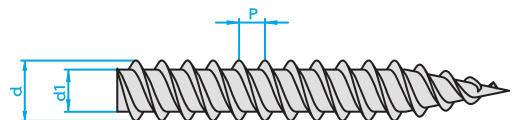


Size	Pitch (nom.) (P)	Major Diameter (d)		Minor Diameter (d1)
		Min.	Max.	Min.
M3.5 (No.6)	1.27	3.43	3.61	2.29
M3.9 (No.7)	1.34	3.78	3.96	2.29
M4.2 (No.8)	1.41	4.09	4.34	2.95


Fastener Length

How to Measure Fastener Length

These types of fasteners are measured from the underside of the head to the tip of the screw.

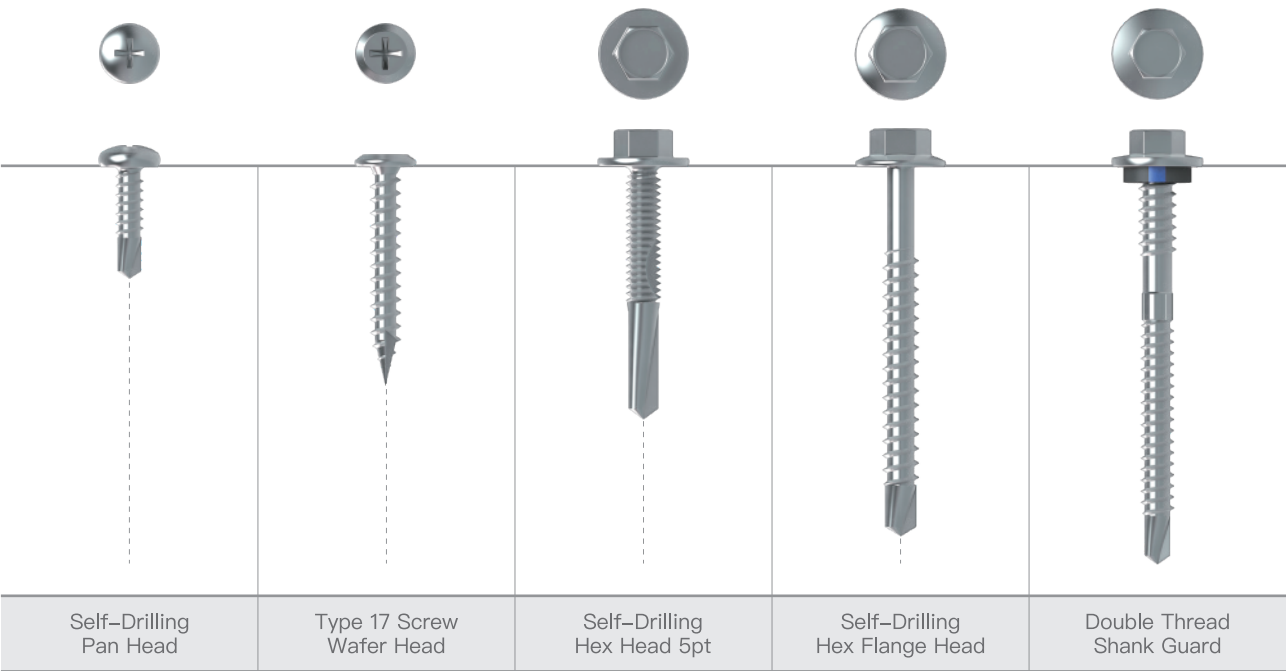

These types of fasteners are measured from the top of the head to the tip of the screw.

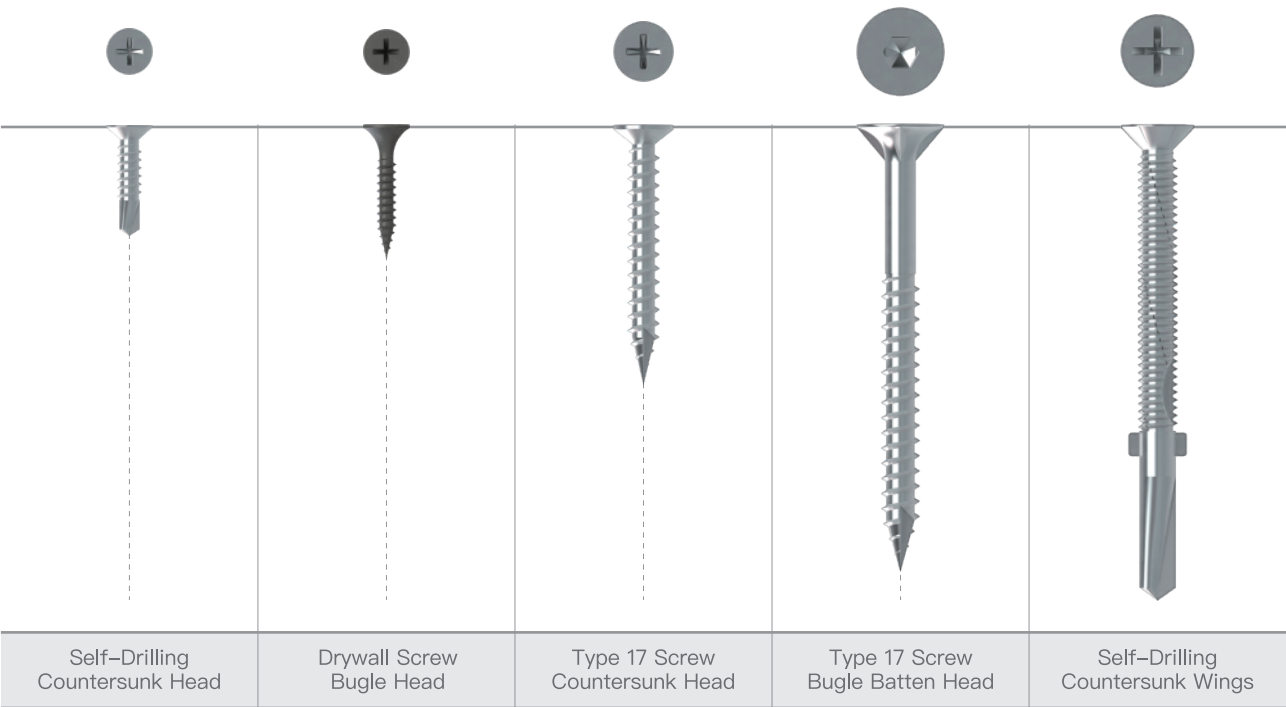




Specialty Series

Specialty screws are purpose-designed and engineered to meet specific application needs that go beyond standard screws. They often feature unique heads, threads, knurls, serrations, combination of materials or coatings to handle demanding environments such as high stress, corrosion, or on heavy duty metal, hardwood, or plastics. These screws provide enhanced performance, precision, and reliability where traditional fasteners may fail.

Stitching Point	Hex Washer Head #5pt	Double Thread #5pt	Fibre Cement #5pt	Fibre Cement #3pt	Double Thread Shank Guard	Fibre Cement BAZ Washer
Sheet to sheet stitching	Roofing and cladding to heavy section steel	Sandwich panels to heavy section steel	Fibre cement to heavy section steel	Fibre cement to light section steel	Steel roof sheeting to steel purlins	Fibre cement to timber purlins and rails



Self-Drilling Screw

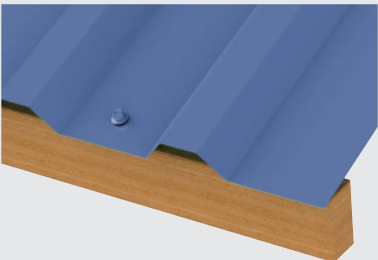

Screws for Colored Roofing Sheets and Cladding

Roofing screws for colored roofing sheets and cladding are specially designed to provide secure, weather-resistant fastening without compromising on appearance or integrity. These screws typically feature self-drilling or reduced drilling-points, along with washered heads—often color-matched—to ensure a watertight seal and seamless visual finish.











- Bonded EPDM sealing washer
- Powder painted head



RAL Color Chart


*Please contact us for colors that are not listed.

9010	7035	7000	7015	8022	8014	8012	8004	1034
6021	6002	6020	5002	4007	4008	3003	3009	1004

				
				
M4.8 (#10) x 19	M4.8 (#10) x 28	M4.8 (#10) x 35	M4.8 (#10) x 55	M4.8 (#10) x 70

Dimension	Drill Point	Drill Capacity (mm)
M4.8 x 19	No.2	1.6
M4.8 x 28	No.2	1.6
M4.8 x 35	No.2	1.6
M4.8 x 55	No.2	1.6
M4.8 x 70	No.2	1.6

Self-Drilling Screw

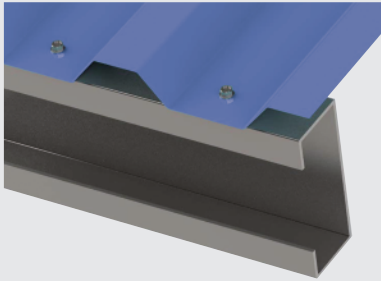






DIN7504K Hex Washer Head

Construction screw for fastening roofing and cladding to light section steel.


- DIN Standard for European market.
- Roofing and cladding to light section steel

Manufactured according to DIN7504K Standards and fine-tuned to meet Customer requirements.

				
M3.5 x L	M4.2 x L	M4.8 x L	M5.5 x L	M6.3 x L

Dimension	Drill Point	Drill Capacity (mm)
M3.5 x 10	No.2	1.0
M3.5 x 13	No.2	1.0
M3.5 x 16	No.2	1.0
M4.2 x 13	No.2	2.0
M4.2 x 16	No.2	2.0
M4.2 x 19	No.2	2.0
M4.2 x 25	No.2	2.0
M4.8 x 16	No.2	2.0
M4.8 x 19	No.2	2.0
M4.8 x 25	No.3	3.0
M4.8 x 32	No.3	3.0
M4.8 x 38	No.3	3.0
M5.5 x 19	No.3	4.0
M5.5 x 25	No.3	4.0
M5.5 x 32	No.3	4.0
M5.5 x 38	No.3	4.0
M6.3 x 19	No.3	4.0
M6.3 x 25	No.3	4.0
M6.3 x 32	No.3	4.0
M6.3 x 38	No.3	4.0

Self-Drilling Screw

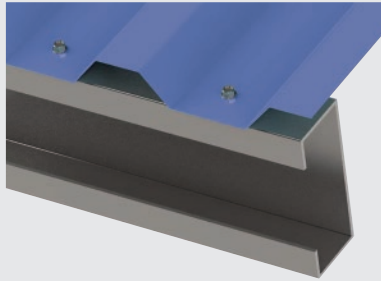






SAE J78 Hex Washer Head

Construction screw for fastening roofing and cladding to light section steel.


- IFI and SAE Standard for American market.
- Roofing and cladding to light section steel

Manufactured according to IFI and SAE Standards and fine-tuned to meet Customer requirements.

				
#6-20 x L	#8-18 x L	#10-16 x L	#12-14 x L	#14-14 x L

Dimension	Drill Point	Drill Capacity (mm)
#6-20 x 3/8"	No.2	1.0
#6-20 x 1/2"	No.2	1.0
#6-20 x 5/8"	No.2	1.0
#8-18 x 1/2"	No.2	2.0
#8-18 x 5/8"	No.2	2.0
#8-18 x 3/4"	No.2	2.0
#8-18 x 1"	No.2	2.0
#10-16 x 5/8"	No.2	2.0
#10-16 x 3/4"	No.2	2.0
#10-16 x 1"	No.3	3.0
#10-16 x 1-1/4"	No.3	3.0
#10-16 x 1-1/2"	No.3	3.0
#12-14 x 3/4"	No.3	4.0
#12-14 x 1"	No.3	4.0
#12-14 x 1-1/4"	No.3	4.0
#12-14 x 1-1/2"	No.3	4.0
#14-14 x 3/4"	No.3	4.0
#14-14 x 1"	No.3	4.0
#14-14 x 1-1/4"	No.3	4.0
#14-14 x 1-1/2"	No.3	4.0

Self-Drilling Screw

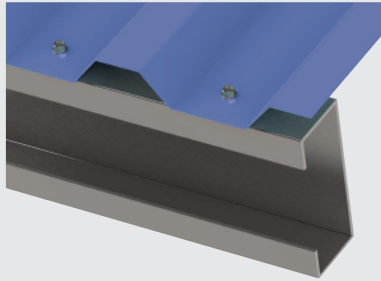





AS3566 Hex Flange Head

Construction screw for fastening roofing and cladding to light section steel.

- AS Standard for Australian market.
- Roofing and cladding to light section steel

Manufactured according to AS3566 Standards and fine-tuned to meet Customer requirements.

			
#8-18 x L	#10-16 x L	#12-14 x L	#14-10 x L


Dimension	Drill Point	Drill Capacity (mm)
#8-18 x 12mm	No.2	2.5
#10-16 x 16mm	No.2	3.5
#10-16 x 25mm	No.2	3.5
#12-14 x 20mm	No.3	4.5
#12-14 x 30mm	No.3	4.5
#12-14 x 35mm	No.3	4.5
#12-14 x 45mm	No.3	4.5
#12-14 x 55mm	No.3	4.5
#12-14 x 65mm	No.3	4.5
#12-14 x 75mm	No.3	4.5
#14-10 x 25mm	No.3	4.5
#14-10 x 42mm	No.3	4.5
#14-10 x 50mm	No.3	4.5
#14-10 x 65mm	No.3	4.5
#14-10 x 75mm	No.3	4.5
#14-10 x 95mm	No.3	4.5

Self-Drilling Screw

Heavy Duty Series

Hex Washer Head #5pt

Application: Fixing cladding to thick steel and drills through 12.5mm thick steel with ease.




Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M5.5 / #12	24	32mm 38mm 50mm 60mm 80mm	12.5

*Please contact us for lengths that are not listed.

Double Thread #5pt

Application: Fixing sandwich panels to thick steel.





Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M5.5 / #12	24	85 mm 150mm 105mm 160mm 115mm 190mm	12.5
M6.3 / #14	24	130mm 240mm 140mm 285mm	

*Please contact us for lengths that are not listed.


Fibre Cement Board Screws #5pt

Application: Fixing Fibre cement to thick steel.

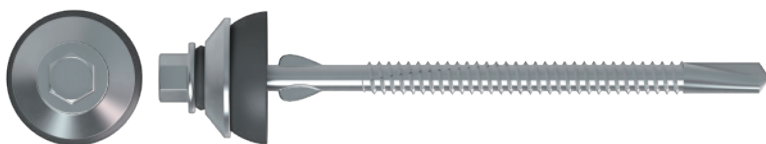

Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M6.3 / #14	14	120mm 155mm 195mm	12.5

*Please contact us for lengths that are not listed.

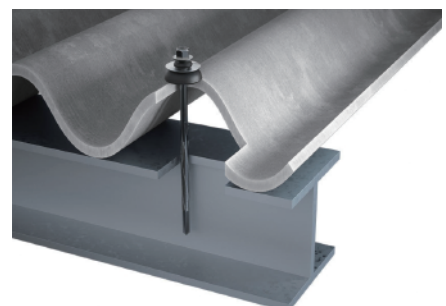




BROADEN
WORLDWIDE CO., LTD

Self-Drilling Screw

Pan Head

Fixing sheeting to steel where a neat finish is required.

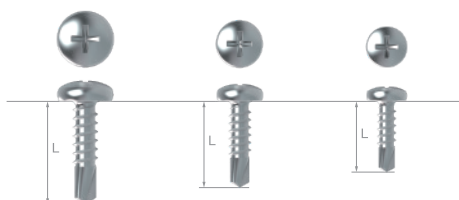

M4.8 x L
#10-16 x L

M4.2 x L
#8-18 x L

M3.5 x L
#6-20 x L



Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M3.5 / #6	20	10mm (3/8")	1.0
		13mm (1/2")	
		16mm (5/8")	
M4.2 / #8	18	13mm (1/2")	2.0
		16mm (5/8")	
		19mm (3/4")	
		25mm (1")	
M4.8 / #10	16	13mm (1/2")	2.0
		16mm (5/8")	
		19mm (3/4")	
		25mm (1")	3.0
		32mm (1-1/4")	
		38mm (1-1/2")	

Button Head

Fixing sheeting to steel where a large head is required.



Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M4.2 / #8	18	13mm (1/2")	2.0
		25mm (1")	
		16mm (5/8")	
		32mm (1-1/4")	
		19mm (3/4")	
		41mm (1-5/8")	

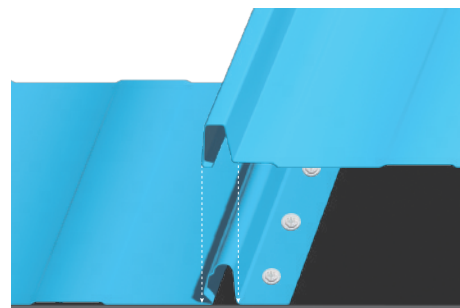


Wafer Head

Fixing sheeting to steel where a low profile is required.




Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M4.8 / #10	16	16mm (5/8")	3.0
		22mm (7/8")	
		32mm (1-1/4")	

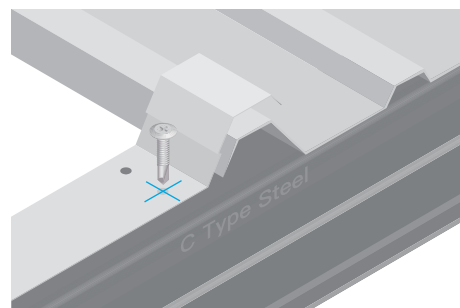

Self-Drilling Screw

Countersunk Head


Fixing sheeting to steel where a neat finish is required.

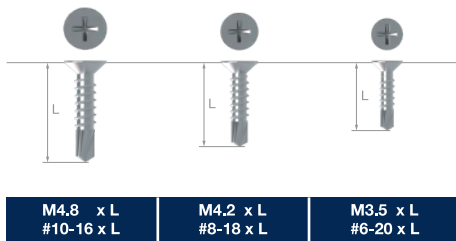

Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M3.5 / #6	20	10mm (3/8")	1.0
		13mm (1/2")	
		16mm (5/8")	
		19mm (3/4")	
		25mm (1")	
M4.2 / #8	18	13mm (1/2")	2.0
		16mm (5/8")	
		19mm (3/4")	
		25mm (1")	
M4.8 / #10	16	13mm (1/2")	2.0
		16mm (5/8")	
		19mm (3/4")	
		25mm (1")	3.0
		32mm (1-1/4")	
		38mm (1-1/2")	

Countersunk Wings #3pt



Fixing timber to light section steel purlins and rails.

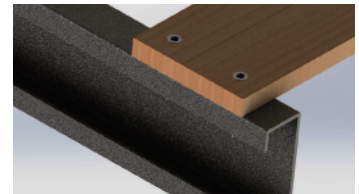

Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M4.8 / #10	16	25mm (1")	3.0
		32mm (1-1/4")	
		38mm (1-1/2")	
		45mm (1-3/4")	
M5.5 / #12	14	38mm (1-1/2")	
		50mm (2")	
		55mm (2-3/16")	
		75mm (2-15/16")	

Countersunk Wings #5pt

Fixing timber to heavy section steel purlins and rails.

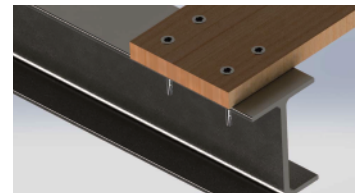








Gauge	TPI	Length (L)	Max. drilling capacity [mm]
M5.5 / #12	24	50mm (2")	10.0
		55mm (2-3/16")	
		75mm (2-15/16")	
M6.3 / #14	24	50mm (2")	
		80mm (3-1/8")	

Type 17 Wood Screws

Type 17 Wood Screws Series


Type 17 timber screws are self-drilling fasteners designed for effortless installation—no pre-drilling required. Their distinctive sharp, fluted tip cuts cleanly into timber, allowing the screw to drive and thread smoothly into the wood while reducing the risk of splitting. Broaden manufactures Type 17 wood screws in a wide range of head styles, lengths, and diameters. Each screw features a sharp, fluted point for smooth drilling and driving, while efficiently clearing wood chips and debris for a cleaner, faster installation.

						
Bugle Batten Head	Countersunk Head	Hex Head Fibre Cement	Double Thread Shank Guard	Hex Flange Head	Hex Washer Head	Wafer Head
Sheet to sheet stitching	Fixing timber sections to timber where a flush finish is required	Fibre cement to timber	Fixing steel roof sheeting to timber battens or rafters	Fixing thin steel to timber	Fixing thin steel to timber	Fixing brackets and roofing clips to timber


Polycarbonate Roof Fasteners

Hex Head Polycarb Fixings for Timber

Fixing polycarbonate roofing sheets to **wooden** purlins and rails.

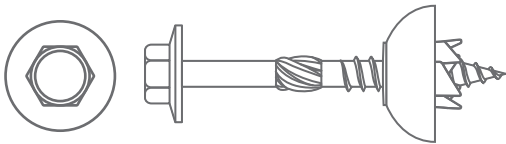


Gauge	TPI	Length (L)	Corrugated	Greca	5-rib
M5.5 / #12	11	50mm (2")	•	•	
		65mm (2-9/16")			•

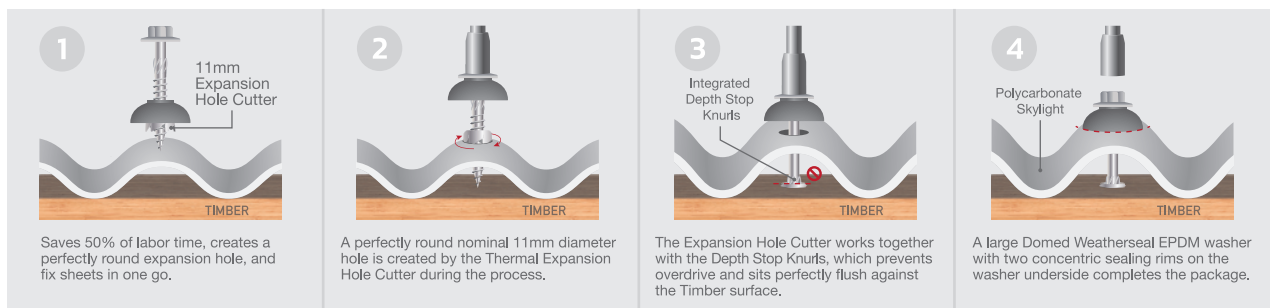



Hex Head Polycarb Fixings for Metal

Fixing polycarbonate roofing sheets to **steel** purlins and rails.

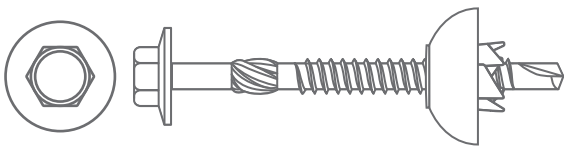

Gauge	TPI	Length (L)	Corrugated	Greca	5-rib
M5.5 / #12	14	60mm (2-3/8")	•	•	•

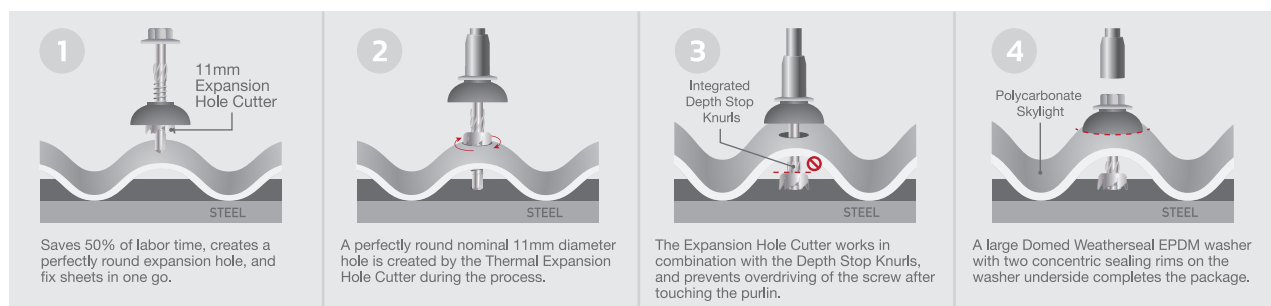

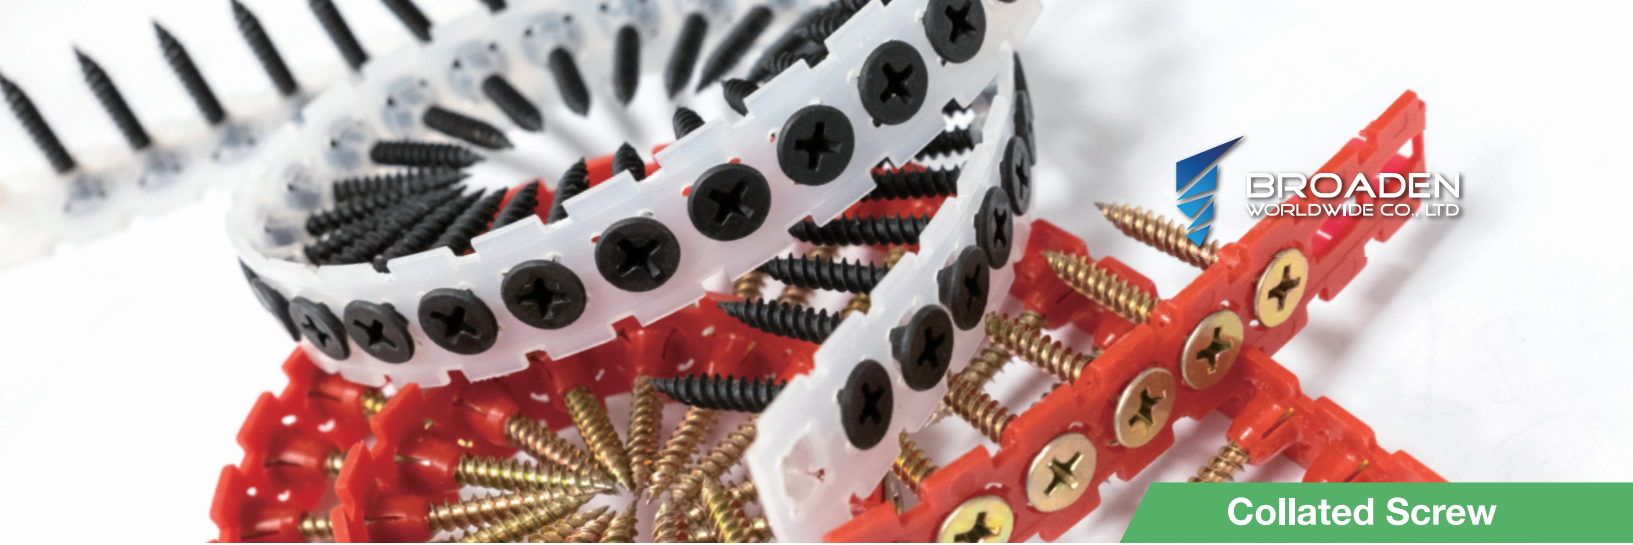

Collated Screw Series

Our collated bugle head drywall screws are designed for automatic feeding, which offers fast & efficient drilling performance for indoor and outdoor applications.


- Stringent, In-house Quality Control
- Fast delivery 60 days (Non-head marked screws only)
- 100% Made in Taiwan
- Customized Packaging Service
- Collated and packaged in-house.

Coarse Thread for Timber

Fixing plasterboard to thin steel up to 0.75mm



Gauge	TPI	Length (L)
M3.5 / #6	9	25mm (1") 32mm (1-1/4") 41mm (1-5/8")

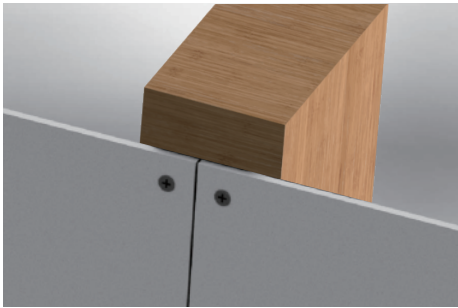


Fine Thread for Thin Steel

Fixing plasterboard to thin steel up to 1.00mm



Gauge	TPI	Length (L)
M3.5 / #6	18	25mm (1") 32mm (1-1/4") 41mm (1-5/8")

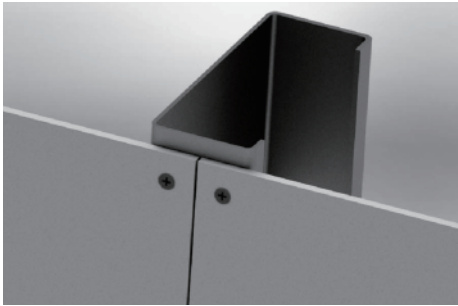

Fastener Corrosion Resistance Classification

The table below is an indication of the warranty period based on the corrosivity of your location and is to be used as a guide only. Environmental conditions and category is complex and can be influenced by a wide range of factors. Note that in certain instances, corrosion zones can extend out further to what is stated above.

ENVIRONMENTAL CONDITIONS	ATMOSPHERIC CORROSIVITY CATEGORIES (ISO 9223)	WARRANTY PERIOD Class 3 Coating	WARRANTY PERIOD Class 4 Coating
 LIGHT INDUSTRIAL URBAN Most areas beyond 50km from the sea, but can be as close as 1 km from seas that are relatively sheltered and quiet.	C2 LOW	25 YEARS	30 YEARS
 INDUSTRIAL Between 2km and 10km from an industrial plant, sewage treatment or airport.	C2 LOW	20 YEARS	25 YEARS
 MODERATE URBAN INDUSTRIAL Urban and industrial areas with low pollution, varies significantly with factors such as winds, topography and vegetation	C3 MEDIUM	15 YEARS	20 YEARS
 SEVERE INDUSTRIAL Within 2km of an industrial plant, aggressive industrial area, sewage treatment or airport.	C4 HIGH	10 YEARS	15 YEARS
 MILD & MODERATE MARINE Coastal areas within 50km from the sea, sheltered with low salinity, varies significantly with factors such as winds and topography.	C3 MEDIUM	15 YEARS	20 YEARS
 SEVERE MARINE Between 400m and 1km from the ocean or within 150m from a salt water inlet or creek.	C4 HIGH	6 YEARS	12 YEARS

Class 3 Coating

Acid Resistant Topcoat

Salt Resistant Base Coat

Special Zinc Treatment

Carbon Steel

Withstand 1000hrs Salt-Spray Test (SST) + 15 Kesternich Cycles [Condensing the atmosphere containing Sulphur dioxide (SO₂) at level SFW 2.0 S – Simulates acid rain or industrial chemical exposure to evaluate the relative corrosion resistance.]

Class 4 Coating

Acid Resistant Topcoat

Salt Resistant Base Coat

Mechanically Plated Zinc-Tin






Carbon Steel

Minimum Porosity Rating of 8 (Micrograph comparison). 45 µm of 98% Zinc composition on hot-dipped galvanized coating. 25-30% of Tin balance Zinc composition on Mechanical Zinc-Tin plating.

Caution* - All corrosion resistance coatings are not created equal, beware of fancy terminology and over-exaggerated performance guarantees!

Fastener Installation Guide

Ensure flawless installation of Tek screws with these easy steps. First, align the sheets accurately to guarantee effective weatherproofing. Avoid the pitfalls of over or under-driving the screws, as this can compromise the tight seal provided by the washer.

PROPERLY DRIVEN	IMPROPERLY DRIVEN		
  <p>Driven straight; good penetration, gasket compressed firmly against the surface.</p>	<p>MISALIGNED</p>  <p>Driven crooked; could contribute to leakage</p>	<p>OVERDRIVEN</p>  <p>Gasket compressed too far-bulges at sides; strips threads; poor engagement</p>	<p>UNDERDRIVEN</p>  <p>Inadequate penetration</p>

Quality Certification

To show our commitment to being a trustworthy supplier, and provide the best product and services, are manufactured and quality controlled following ISO standards, and is of course, ISO-9001:2015 certified.



ISO 9001 Certificate



EN 14566 Certificate



D-U-N-S® Certified

Packaging Types

Different Packaging Types

Standard Outer Box
Size: 270x390x200mm



Bulk Carton (A)
Size: 320x180x170mm



Bulk Carton (B)
Size: 270x215x162mm



Plastic Tub
Size: 210x175x125mm



Standard Inner Box
i6: 125x250x90(H)mm



Standard Inner Box
i8: 125x180x90(H)mm



Standard Inner Box
i12: 125x115x90(H)mm



Standard Inner Box
i16: 90x125x90(H)mm




Standard Inner Box
i24: 90x80x90(H)mm



Standard Inner Box
i36: 80x60x90(H)mm



Specialty (A) Outer Box
i6: 560x195x135mm



Specialty (A) Inner Box
i5: 105x180x120mm



Specialty (A) Inner Box
i10: 105x90x120mm




Specialty (B) Outer Box
Size: 317x155x168mm



Specialty (B) Inner Box
i3: 102x147x150mm



Collated Screws Outer Box
Size: 573x248x280mm



Collated Screws Inner Box
Size: 570x120x60mm




Standard PE Bag
Large: 210x230mm



Standard PE Bag
Small: 160x160mm



Hang Hole Zip Lock Pack Outer Box
Size: 550x195x160mm



Hang Hole Zip Lock Pack
Size: 180x240mm+45mm





BROADEN
WORLDWIDE CO., LTD

**Broaden Company – Leading Taiwanese manufacturer
of high-performance fasteners.**



Broaden Worldwide Co., Ltd.

NO. 47-37, Jiahua Rd., Gangshan Dist., Kaohsiung City 820, Taiwan

T +886-7-6282702 **F** +886-7-6282601

E info@broadenal.com.tw **W** www.bdnngroup.com.tw